

### Application and Design


Model HCD-220 is a heavy duty industrial control damper with a flanged frame. It is designed to control airflow and provide shut off in HVAC or industrial process control systems. A variety of optional features makes model HCD-220 extremely versatile, allowing its capabilities to be tailored to the application. This model is available with parallel or opposed blade action.

### Ratings (see page 2 and 3 for specific limitations)

**Pressure:** Up to 15 in. wg (3.7 kPa) - differential pressure

**Velocity:** Up to 4000 fpm (20.3 m/s)

**Temperature:** -40 to 600°F (-40 to 315°C). Consult factory for other temperatures.

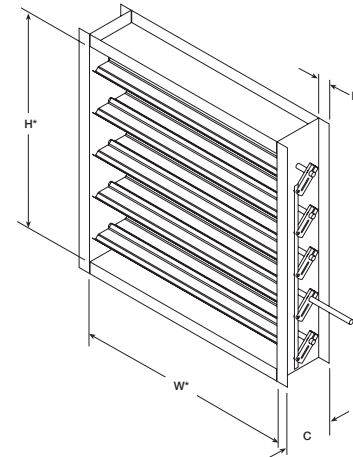

### Standard Construction

	Standard	Optional
<b>Frame Depth (C)</b>	8 in. (203mm)	10 in. (254mm)
<b>Frame Material</b>	Galvanized Steel	304SS, 316SS, Painted
<b>Frame Type</b>	Flanged Channel	
<b>Frame Thickness</b>	14 ga. (2mm)	10 ga. (3.5mm) 12 ga. (2.7mm)
<b>Flange Width (D)</b>	2 in. (51mm)	1½ in. (38mm) 2½ in. (64mm) 3 in. (76mm)
<b>Blade Action</b>	Parallel	Opposed
<b>Blade Material</b>	Galvanized Steel	304SS, 316SS, Painted
<b>Blade Seals</b>	None	EPDM, Silicone
<b>Blade Thickness</b>	12 ga. (2.7mm)	10 ga. (3.5mm)
<b>Blade Type</b>	3V	
<b>Linkage</b>	Plated Steel	304SS, 316SS
<b>Jamb Seals</b>	None	316SS
<b>Axle Diameter</b>	¾ in. (19mm)	-
<b>Axle Bearing</b>	Stainless Steel Sleeve	External Bronze, External Ball, Outboard Bronze, Outboard Ball
<b>Axle Material</b>	Plated Steel	303SS, 316SS
<b>Axle Seals</b>	None	O-ring, Double Gland
<b>Paint Finishes</b>	None	Hi Pro Polyester, Hi Temperature Flame Control, Hi Temperature Silver, Industrial Epoxy
<b>Mounting Holes</b>	None	Standard; Standard with corner holes

\* Actual Inside Dimension. The W dimension is ALWAYS parallel with the damper blade length.

Damper linkage and axles may extend beyond the damper flange based on the configuration of selectable options. Consult factory for dimensions.

### Size Limitations

W x H	Minimum Size	Maximum Size	
		Single Section	Multi - Section
<b>Inches</b>	6½ x 6	48 x 96	96 x 96
<b>mm</b>	165 x 152	1219 x 2438	2438 x 2438

### Features:

- Wide range of actuators available

### Options:

- Vertical blade orientation

## Pressure Limitations

The chart at the right shows conservative pressure limitations based on a maximum blade deflection of  $w/360$ .

## Temperature Limitations

**Blade seals:** Silicone -40° to 400°F (-40° to 204°C)



EPDM -20° to 250°F (-29° to 121°C)

**Jamb seals:** Flexible stainless steel -40° to 400°F (-40° to 204°C)

For higher temperatures, consult factory.

## Velocity Limitations

The chart at far right shows velocity limitations based on damper size.

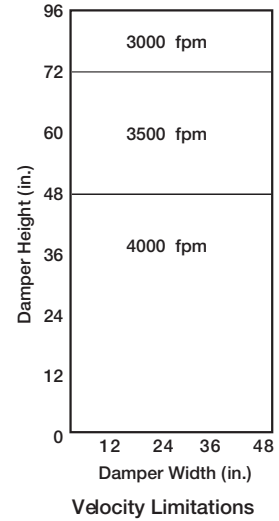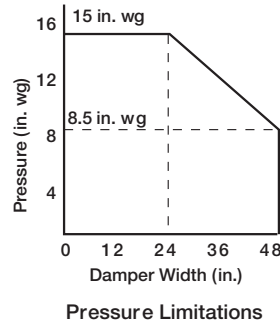

## Pressure Drop Data

This pressure drop data was conducted in accordance with AMCA Standard 500-D using the three configurations shown. All data has been corrected to represent standard air at a density of .075 lb/ft<sup>3</sup> (1.2 kg/m<sup>3</sup>).

Actual pressure drop found in any HVAC system is a combination of many factors. This pressure drop information along with an analysis of other system influences should be used to estimate actual pressure losses for a damper installed in a given HVAC system.

## AMCA Test Figures

**Figure 5.3** illustrates a fully ducted damper. This configuration has the lowest pressure drop of the three test configurations because the entrance and exit losses are minimized by straight duct runs upstream and downstream of the damper.

**Figure 5.2** illustrates a ducted damper exhausting air into an open area. This configuration has a lower pressure drop than Figure 5.5 because the entrance losses are minimized by a straight duct run upstream of the damper.

**Figure 5.5** illustrates a plenum mounted damper. This configuration has the highest pressure drop because of the high entrance and exit losses due to the sudden changes of area in the system.

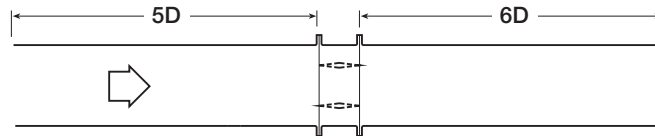


Fig. 5.3

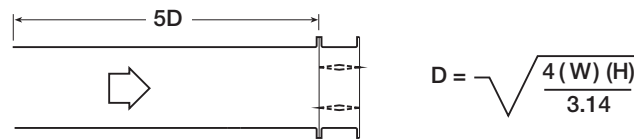


Fig. 5.2

$$D = \sqrt{\frac{4(W)(H)}{3.14}}$$


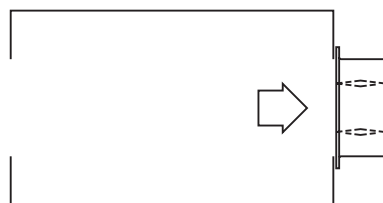


Fig. 5.5

## Pressure Drop

36 x 36 in. Damper  
(914mm x 914mm)

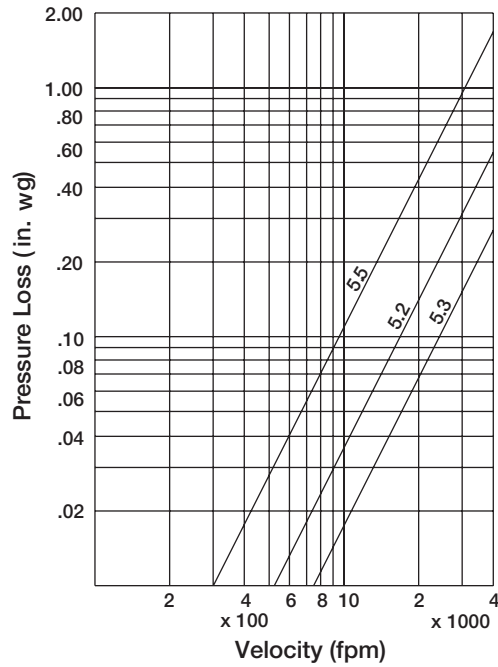


## Leakage Data


Damper leakage (with blades fully closed) varies based on the type of low leakage seals applied. Model HCD-220 is available with no jamb seals (standard) or with stainless steel jamb seals and EPDM, or silicone rubber blade seals. Leakage testing was conducted in accordance with AMCA Standard 500-D and is expressed as CFM per sq. ft. of damper face area. All data has been corrected to represent standard air at a density of .075 lb/ft<sup>3</sup> (1.2 kg/m<sup>3</sup>).

## Leakage


36 x 36 in. (914mm x 914mm) Damper  
(based on 5 in. lb/ft<sup>2</sup> of torque)

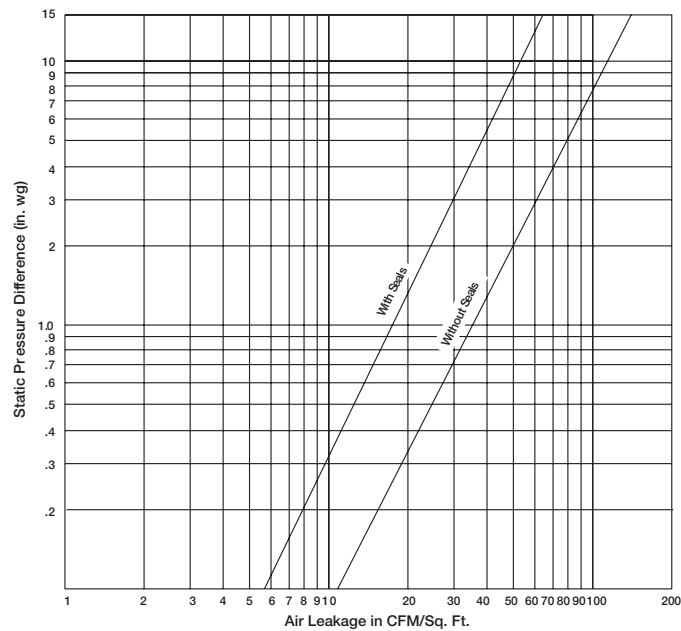

Bolt holes are available as an option. The standard pattern is  $\frac{7}{16}$  in. (11mm) diameter holes (M dimension) spaced 6 in. (152mm) on center (L dimension). Custom bolt hole patterns are available. Contact factory for the limitations.

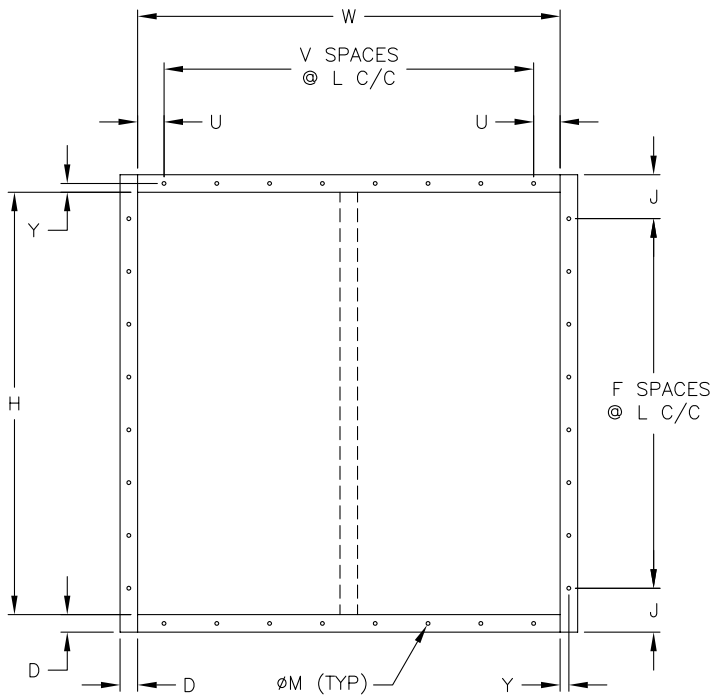

Standard Mounting Hole Pattern  
Typical for single or double wide panel

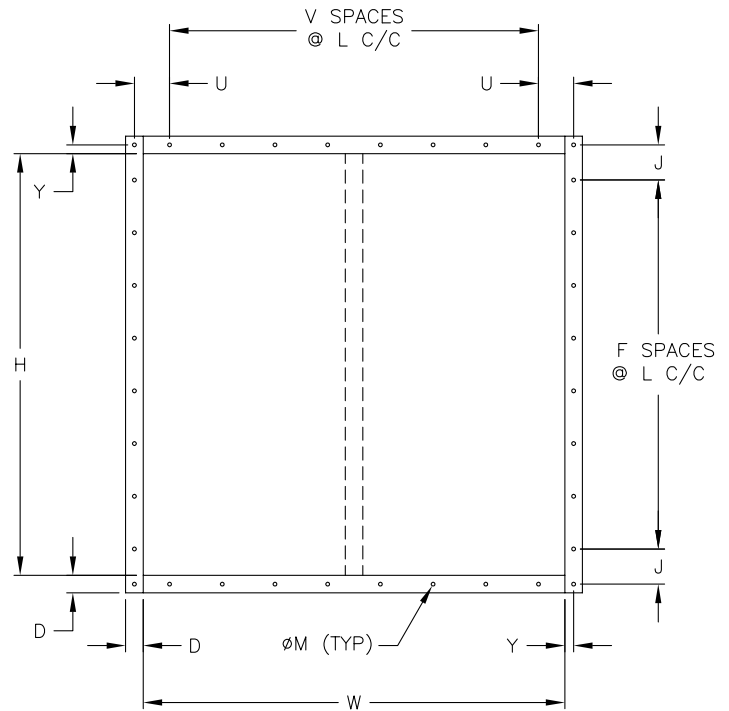

Standard Mounting Hole Pattern with Corner Holes  
Typical for single or double wide panel

## Specifications

Industrial grade control dampers meeting the following specifications shall be furnished and installed where shown on plans and/or as described in schedules.

Dampers shall consist of: a 14 ga. (2mm) galvanized steel channel frame with 8 in. (203mm) minimum depth and 2 in. (51mm) flanges; 3V type blades fabricated from 12 ga. (2.7mm) galvanized steel;  $\frac{3}{4}$  in. (9.5mm) dia. plated steel axles turning in stainless steel sleeve bearings; and external (out of the airstream) blade-to-blade linkage.

Damper manufacturer's printed application and performance data including pressure, velocity, and temperature limitations shall be submitted for approval showing damper suitable for pressures to 15 in. wg (3.7 kPa), velocities to 4,000 fpm (20.3 m/s) and temperatures to 600°F (315°C).

Specifier may add the following:

Damper shall be equipped with blade and jamb seals for low leakage performance. Blade seals shall be EPDM for 250°F (121°C) or Silicone rubber for 400°F (204°C) maximum temperature. Jamb seals shall be flexible stainless steel. Testing and ratings shall be per AMCA Standard 500-D.

Basis of design is model HCD-220.