

Application

The SEBR-10 series is an eccentrically pivoted backdraft damper for low velocity systems. SEBR-10 series is a horizontally mounted damper and designed to allow vertical airflow up and prevent reverse airflow. On-blade counterweights are provided to fine tune start-to-open and full open blade operation. Ball bearings minimize friction.

Recommended Applications

- Gravity hood intake and exhaust
- Stairwell pressurization
- Room pressurization
- Ductwork outlets

Poor Applications

- Propeller fan outlets (high velocity)
- Centrifugal fan outlets (high velocity)
- Building pressurization (sensitive to wind)
- Pressure relief exceeding 0.3 in. wg (0.075 kPa)

Ratings

Back Pressure

2.0 in. wg (0.5 kPa)

Start-to-Open Pressure

0.05 in. wg (.01 kPa)

Velocity

2,000 fpm (10.2 m/s)

Temperature

180°F (82°C)

Construction


| | Standard | Optional |
|------------------|---------------------------------------|----------|
| Frame Material | 316SS | - |
| Frame Thickness | 16 ga. (1.5mm) | - |
| Frame Type | No Flang (SEBR-10) | - |
| | Flange on Discharge (SEBR-11) | - |
| | Flange on Intake (SEBR-12) | - |
| Blade Material | 316SS | - |
| Blade Seal | TPE | None |
| Blade Thickness | 20 ga. (1mm) | - |
| Axle | 3/8 in. (9.5mm) sq. 316SS | - |
| Axle Bearings | 316SS with acetal races | - |
| Linkage Material | 316SS | - |
| Jamb Seal | None | EPDM |
| Counterbalance | Blade mounted with adjustable weights | - |

Feature

- Selectable start open from .05 to .30 in. wg (0.012 kPa - 0.075 kPa).



*W & H dimensions furnished approximately 1/4 in. (6mm) undersize.

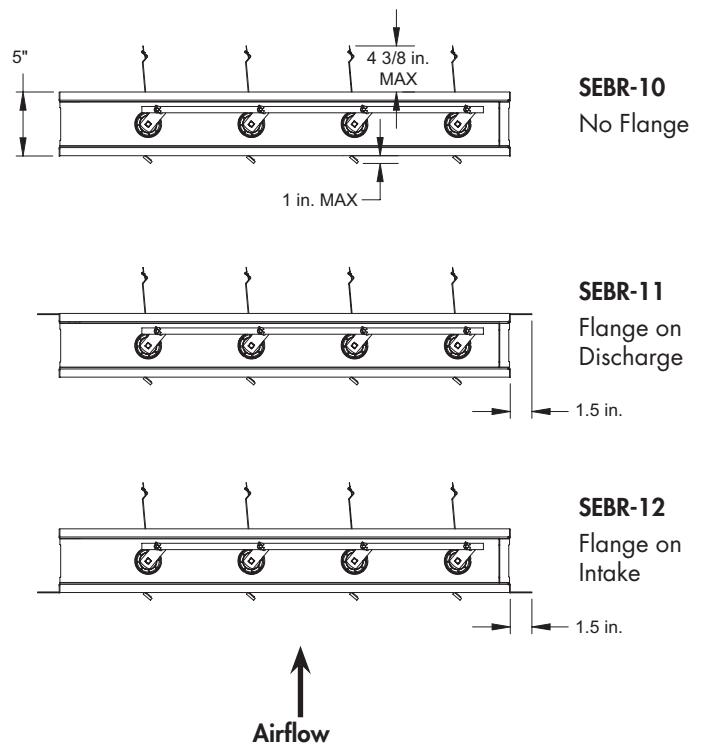



Size Limitations

| W x H | Minimum Size | Maximum Size | |
|--------|--------------|----------------|-------------------|
| | | Single Section | Multiple Sections |
| Inches | 8 x 6 | 48 x 74 | 96 x 148 |
| mm | 203 x 152 | 1220 x 1880 | 2438 x 3759 |

Performance Data

Performance data results from testing a 12 in. x 12 in. and 36 in. x 36 in. (305mm x 305mm and 914mm x 914mm) in accordance with AMCA Standard 500-D using Figure 5.3 (fully ducted), 5.2 (ducted exhausting into an open area), and 5.5 (plenum mounted). All data has been corrected to represent standard air density at 0.075 lb/ft³ (1.201 kg/m³).

Pressure drop data shown is based on minimum start open pressure. Higher start open pressure will result in different pressure drop.

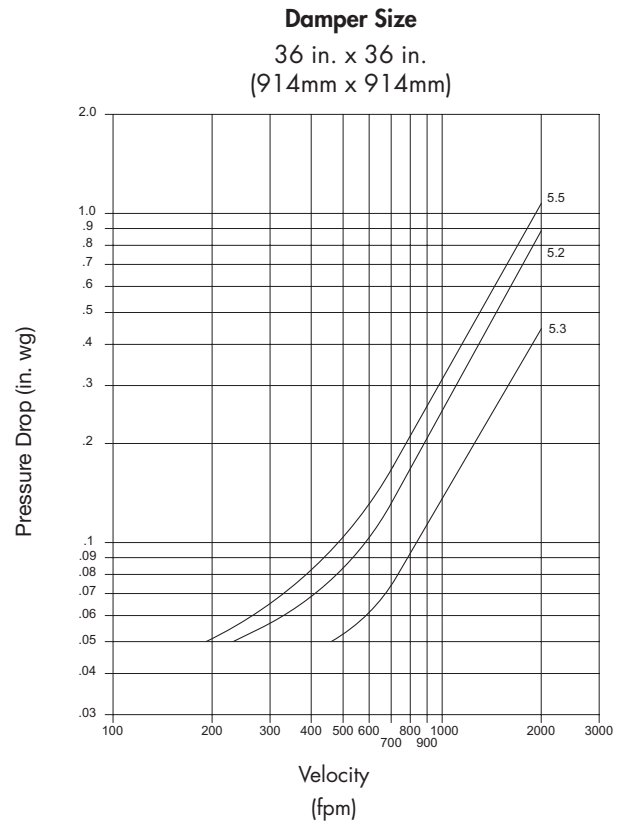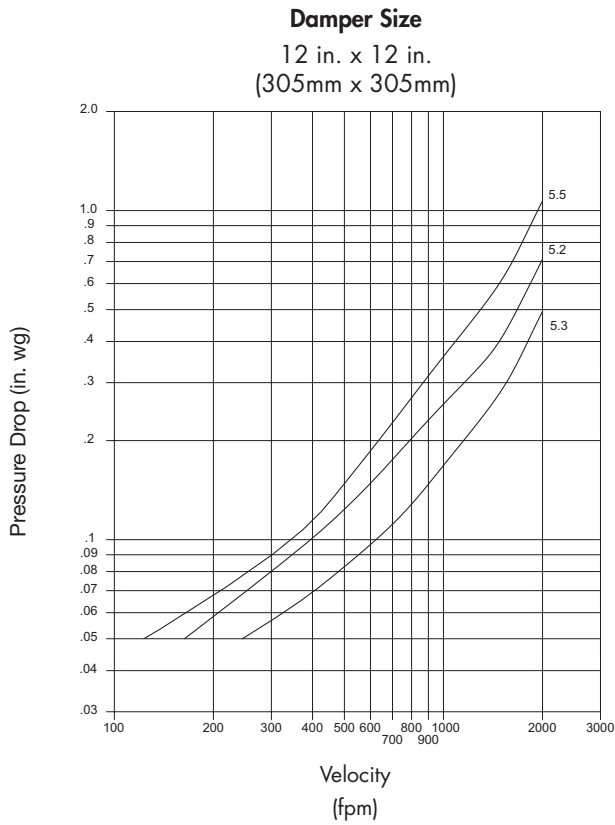

Document Links

[Installation Instructions](#)



[Product Catalog](#)



[Damper Warranty](#)

