


VCFC • VCFI

High Volume, Low Speed (HVLS) Ceiling Fans

Large diameter ceiling fans provide airflow for effective air circulation and enhanced comfort in commercial and industrial spaces. With a variety of benefits including personnel cooling, humidity control, and heat distribution, these fans are an ideal selection for many applications.

Product Advantages

- **VARIETY** multiple fan models, designs and sizes for all application needs
- **COMFORT** air performance provides up to 15F of cooling in the summer
- **ENERGY SAVING** reduce HVAC operating costs up to 30% annually
- **SAFE OPERATION** intuitive controls, intelligent VFDs and more than 10 standard safety features
- **QUICK INSTALLATION** factory-wired plug-and-play convenience

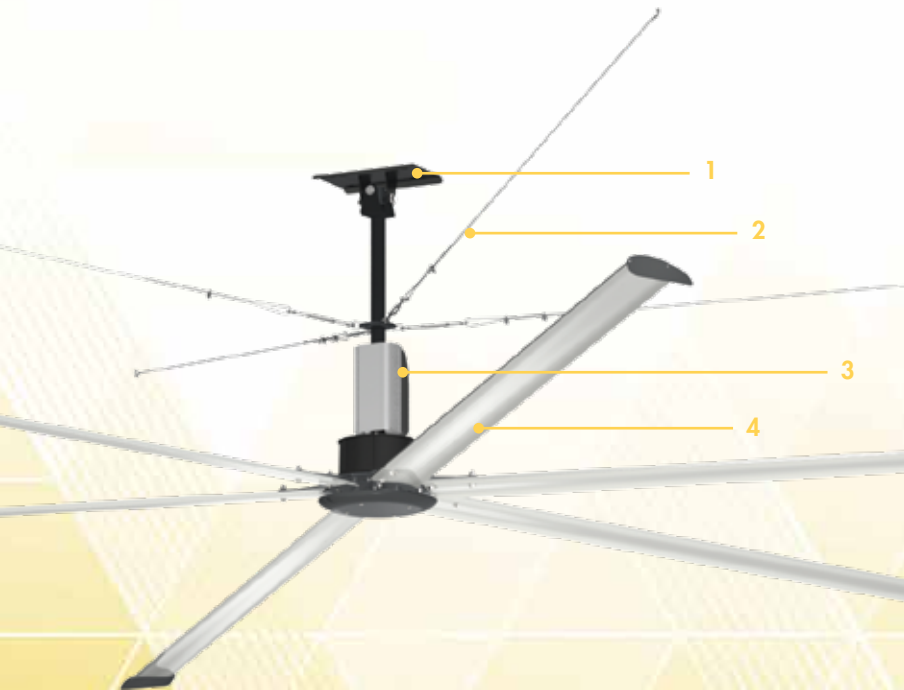

Standard Construction Feature

1. Universal ceiling mount
2. Guy wire kit
Model VCFC: 15-foot guy wires included for drop lengths greater than or equal to four feet
Model VCFI: 20-foot guy wires included with all drop lengths
3. Intelligent VFD and direct drive motor
4. Extruded aluminum airfoils
5. Plug-and-play power, communications, and fire system wiring (not shown)




COMMERCIAL/INDUSTRIAL APPLICATIONS

Office Spaces • Restaurants • Fitness Centers • Education Facilities
Warehouses • Automotive Shops • Stadiums • Gymnasiums

**HIGH VOLUME,
LOW SPEED FANS**



High Volume, Low Speed (HVLS) Ceiling Fan Selection Chart

Model	Building Type			Features									Certification				
	High End Residential	Commercial	Industrial	Forward and Reverse Operation	Fan Size (ft)	Weight (lbs)	Direct Drive Motor (hp)	Voltage / Phase	Standard Drop Length (ft.)	100 ft. of CAT-5e Control Cable	Fire Relay (For Fire Suppression System)	Standard 10 Year Warranty	AMCA Circulating Fan Performance	UL/cUL 507 Listed for Electrical	UL/cUL 507 Listed for Damp	Maximum Volume Range (cfm)	Maximum Coverage Area Range (ft ²)
 VCFC-5	■	■		■	8 to 14	70 to 91	1/4	115-230/1	2	■	■	■	■	■	■	29,000 to 55,800	9,200 to 12,500
 VCFI-3		■	■	■	8 to 24	104 to 144	3/4	208-277/1, 208-460/3	3-1/2	■	■	■	■	■		23,500 to 176,900	9,100 to 18,700
 VCFI-6		■	■	■	8 to 24	129 to 222	3/4 – 1-1/2	208-277/1, 208-460/3	3-1/2	■	■	■	■	■		28,600 to 243,000	11,300 to 23,700

Optional Accessories & Configurations

- Mounting kits
- LED light
- Extended drop lengths
- Extended length CAT-5e control cable
- Disconnect switches
- Extended warranty
- HVLS keypad controller
- HVLS standard touchscreen control
- HVLS advanced touchscreen control
- HVLS advanced touchscreen control with BACnet®
- Temperature and humidity sensors
- Anodized, hi-pro polyester, or woodgrain finish options



Safety Orange	Concrete Grey
Safety Yellow	Hampton Brown
Signal Violet	Medium Bronze
Utility Red	Flat Black
Signal Blue	Cinnamon Cherry
Equipment Green	Dark Oak
Bone White	Golden Knotty Pine
Ivory	Honey Knotty Pine
Telegrey 4	Natural Cherry

Color is for reference only and is not to be used for final color matching. Anodized finishes not shown.